

Aerial Robotics Competition: Lessons in Autonomy

Paul Y. Oh*, Keith W. Sevcik, and William E. Green
Drexel University, Philadelphia, PA, USA 19104
Email: [paul.yu.oh, Keithicus, weg22]@drexel.edu

Abstract

In May 2005, the Indoor Aerial Robot Competition was inaugurated. The goal of this annual event is to identify best design practices and gain insight on technical challenges facing the realization of near-Earth unmanned air vehicles. This paper describes the motivation, goals and objectives of this competition. Over the past two years, undergraduate teams from the Philadelphia-region participated from schools like Drexel, Swarthmore, Bryn Mawr, Rowan, Rutgers and Villanova. Robot design, competition highlights and lessons learned are described in this paper.

1 Introduction

In the United States, congress has mandated that one third of all fighter aircraft are to be unmanned by the year 2015 [2]. This has far reaching and global impacts to both military and civilian aviation where both manned and unmanned aircraft will share a common airspace. With less than a decade remaining, there are still open problems and technical challenges.

One area of particular interest is flying in near-Earth environments like caves, forests, tunnels and buildings [7]. Such areas are often characterized by poor GPS reception, degraded communication and varied illumination. As such, executing missions like search-and-rescue and disaster mitigation are especially time-consuming, laborious and dangerous [1] [5]. Aerial robots that can fly autonomously in near-Earth environments could provide incident commanders, first responders and medics with situational awareness and forward area coverage.

Key to realizing near-Earth aerial robots are collision avoidance sensor suites. The critical gap in the knowledge base is the absence of performance metrics and technical design requirements. Unclear are sensor pa-

*IEEE Member. Address all correspondence to this author. This work was supported in part by the National Science Foundation CAREER award IIS 0347430

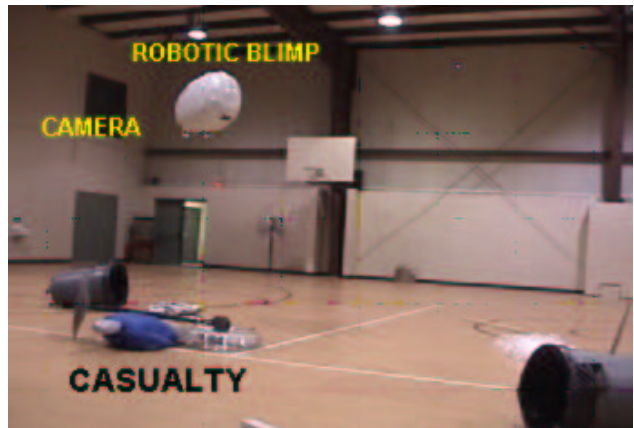


Figure 1: Emulated disaster area. The robotic blimp with its wireless bellycam must locate casualties.

rameters like resolution, dynamic range, bandwidth and signal-to-noise ratios that would be necessary for flying in near-Earth environments. Equally important and undefined are flight characteristics like turning radius and cruise speed. The net effect is a multi-faceted set of open design issues that make designing near-Earth aerial robots ad hoc and haphazard.

In recent years, robot competitions have been a means to discover best practices through well-structured piecemeal problems [6] [4]. As such, an annual indoor aerial robot competition could potentially yield design insight. In 2003, Drexel University began framing an annual competition with the goal that by 2015, a backpack sized robot would autonomously fly in and around buildings. As Figure 2 illustrates, each year's event builds upon the successes of previous years. Furthermore, there are years where particular expertise is required. In 2007-2008 for example, the challenge demands handling suspended loads and thus may require experts in non-linear control of tethered payloads. This provides opportunities to outreach and impact research communities beyond just those involving UAVs or robotics. Lastly, results of each year's competition are disseminated at technical con-



Figure 3: Swarthmore College’s blimp following the collision-free path.

ferences and teams are encouraged to openly provide access to their designs. This paper describes competitions that were held in May 2005 [3] and May 2006. Section 2 gives a brief overview of the competitions. Sections 3 and 4 details the blimp, flight control electronics and sensors that were recommended to each team. Lessons learned and Conclusion are given in Sections 5 and 6 respectively.

2 Competition Overview

In 2003, with support from the Philadelphia-region ASME, a competition that involved school teams in the local area was conceived. The idea was to keep the competition manageable in the first few years to assess outcomes and grow the event accordingly. Blimps were used as the flying platform because it is affordable, safe and does not demand much flying skill. The rationale was that blimps could serve as a surrogate vehicle for identifying best practices and maturing sensor suites and algorithms. As Figure 2 illustrates, the competition envisions replacing the blimp with rotorcraft in 2010, when suitable vehicles will likely be more available.

The inaugural competition was held at Swarthmore College in May 2005 and focused on understanding visual-servoing and human-robot interaction. The competition goals were simple line-following and teleoperation.

Teams had to implement a line-following algorithm in real-time that was invariant to changing lighting conditions (see Figure 3). Towards the end of the course,

robots were met with a low-speed fan to simulate wind disturbances. Points were awarded based on how far through the course robots were able to travel.

The other section of the competition consisted of several mock victims spaced out in a 90×50 square foot area (see Figure 1). Using a wireless camera mounted on the blimp’s gondola, teams utilized teleoperated control to identify survivors and deploy markers (symbolic of radio beacons). Blimp operators were only permitted to view video images transmitted wirelessly from the blimp’s camera and could not directly view the search area. Points in this section were awarded based on the marker’s proximity to survivors.

Such goals served to establish the necessary computer vision software and wireless communication infrastructure to be leveraged in future years. For example, the 2006 competition goals were map building and hover-and-stare (see Figure 4). The software and hardware constructed in 2005 were useful for new teams to quickly ascend learning curves and participate.

The budget for the competition was assisted by the ASME Philadelphia Region. Each student team had a professor who served as an advisor. The professor was given \$400 to distribute to the team in any manner. Some used the funds to treat the competition as part-time work. Others supplemented departmental contributions to purchase hardware and software.

Competition rules, notional videos¹, parts lists and related material were made available to all teams. In 2005, schools that were involved included Swarthmore, Drexel, Villanova and Rowan. The competition grew to more teams in 2006 with Drexel, Bryn Mawr, Rowan, Villanova and Rutgers. The 2007 competition will likely involve additional area schools, with goals in cargo-lift and perch-and-stare.

3 Platform

Helium is the most common gas used in blimps today, with a lifting capacity of 1.02 kg/m^3 at standard temperature and pressure. The blimp holds roughly $.17 \text{ m}^3$ of helium, giving it a theoretical lifting capacity of 174 g . Experimental results show an actual lifting capacity of 200 g . The total mass of the balloon, gondola, fins and mounting tape is 135.8 g . Therefore, the maximum payload that can be carried by the blimp is 64.2 g . This is substantially greater than

¹Videos: <http://www.mem.drexel.edu/aerialRobotics>

Task	'05	'06	'07	'08	'09	'10	'11	'12	'13	'14	'15
Line Following, ID Tagging - Computer Vision Tool Kit (fans)	█										
Map Building, Hover-and-Stare - Pattern Recognition, Visual-Servoing (fans)	█	█									
Cargo-Lift and Transport, Perch-and-Stare - Visual-servoing, rigid loads (fans)	█	█	█								
Cargo-Lift, Transport and Endurance - Suspended load demands dynamics/control				█	█						
Obstacle Avoidance - Cargo transport in 2D obstacle course					█	█					
Obstacle Avoidance - Cargo transport in 3D obstacle course					█	█	█				
Cargo-Lift and Transport (blimp or rotor) - Gust-Stabilization, Illumination, Fog	█	█	█	█	█	█	█				
Rotorcraft Line Following and ID Tagging Computer Vision and Visual-Servoing	█	█	█	█	█	█	█	█			
Rotorcraft Map Building, Hover- and Perch- and-Stare with Cargo Lift and Transport	█	█	█	█	█	█	█	█	█		
Rotorcraft Obstacle Avoidance 2D course with Hazards	█	█	█	█	█	█	█	█	█		
Rotorcraft Obstacle Avoidance 3D course with Hazards	█	█	█	█	█	█	█	█	█	█	
Final Vehicle Configuration: Autonomous demo with Hazards and Disturbances	█	█	█	█	█	█	█	█	█	█	█

Figure 2: 15-year Competition Timeline



Figure 4: 2006 Competition: Maze navigation notion (top left) was physically realized in the Drexel Gymnasium (top middle). Props for the hover-and-stare stage of the competition were also constructed (top right). Drexel's entry navigating in the maze with visual fiducials on the floor (bottom left). The blimp was controlled from a ground station that displays the vehicle's on-board camera (bottom middle). Bryn Mawr's blimp in the hover-and-stare stage of the competition (bottom right).

typical near-Earth fixed- or rotary-wing micro air vehicles (MAVs), making it an ideal platform for testing a variety of sensors.

The blimp has two electric motors with attached propellers positioned on the gondola which allow forward and backward movement. These two motors can also pivot via a radio-controlled (RC) servo to provide an upward or downward angle to the thrust vector, as depicted in Figure 5. This allows the blimp to increase or decrease its altitude respectively. Yaw (i.e. rotation about the vertical axis) is controlled by an electric motor and propeller placed in the blimp’s rear fin.

The blimp that was used by Drexel University was obtained from Plantraco ², and was modified with a small RC receiver and a micro servo for altitude actuation. A speed controller was added to give proportional control of the speed of the blimp. Once manual control via the RC transmitter was established, a map of the channels was created, and was inserted into the PC2RC program (described further in Section 3.1). With this, computer control was established. A vision system, which consisted of a wireless camera whose receiver was plugged into the computer, parsed the information for line-following. The output of this program was also sent to PC2RC to actuate autonomous control.

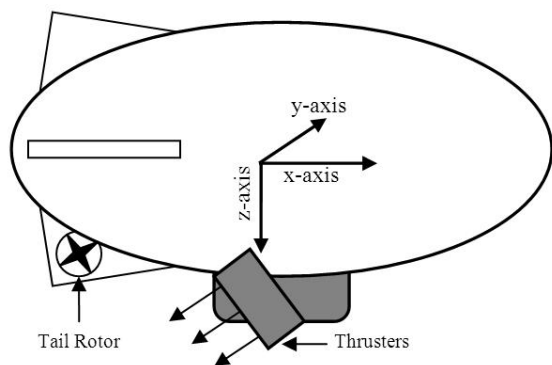


Figure 5: Blimp Diagram.

3.1 PC2RC

In order to allow the blimp to be autonomously controlled by a ground-based PC, a PC-to-RC circuit (dubbed PC2RC) was constructed [8]. Figure 6 shows how the circuit is interfaced with the PC and a standard 4-channel RC transmitter. This setup allows digital commands sent from the PC to be converted into

²<http://www.plantraco.com>

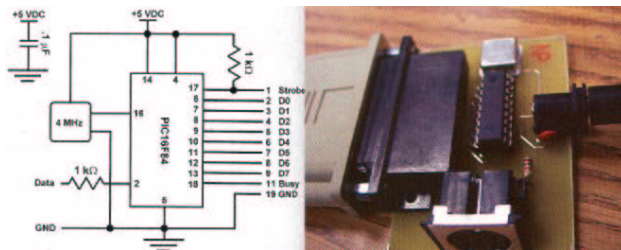


Figure 6: A schematic of the PC to RC circuit and the resulting PIC pin outs.

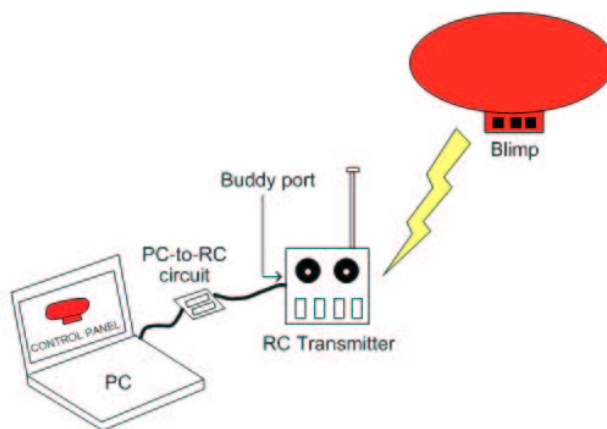


Figure 7: A PC-to-RC circuit converts digital commands to RC signals. Commands are then sent wirelessly to the blimp through a RC transmitter.

Pulse Width Modulated (PWM) signals. PWM signals can then be sent wirelessly to the blimp’s onboard receiver.

The control software running on the PC generates 8-bit numbers for each of the 4 channels on the transmitter. The numbers correspond to the length of the PWM signal. Pulse lengths vary from 1 to 2 ms, where 1.5 ms usually represents the neutral position of a RC servo. The microcontroller, integrated into the PC-to-RC circuit, receives the numbers and generates the pulse to be sent to the RC transmitter. The pulses are grouped into frames, with a frame containing one pulse for each channel.

The frames sent from the microcontroller are received through the buddy port on the transmitter. Traditionally, the buddy port is used to allow a trainer to take over the control of an amateur under their tutelage (see Figure 7). This port can also be used to allow the computer to take control of the transmitter. Autonomous control can then be achieved based on

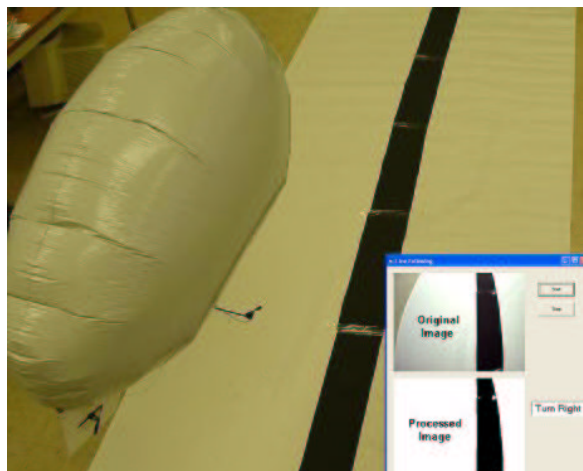


Figure 8: A wireless camera is coupled with a computer vision algorithm to achieve line following.

information gathered about the surrounding environment.

4 Sensors

The blimp's intelligence is obtained via a wireless on-board camera which transmits a video stream back to a computer that processes image data and issues proper control commands. The video and transmitter are constructed as a lightweight package, making it ideal for use in near Earth aerial robotics. Integrating such hardware can produce a robust sensor suite for near-Earth environments.

To perform line-following, a wireless image acquisition system is required. RC Toys' *Eyecam*³ provides a reliable wireless video feed when utilized indoors. It is about as small as a U.S. quarter coin, weighs just 15 grams and transmits color video on at 2.4 GHz. The output from the receiver is composite video, which can be digitized with Hauppauge's USB-Live⁴ in order to plug-and-play into a PC.

To demonstrate line following, the blimp was placed over a black line with a white background. A program was created to process the video feed. The video was then thresholded into a simple black and white image. To process the code as fast as possible, thresholding was kept to every third pixel. Code was written to calculate the location of the centroid of the line within the image plane. Line following code consisted

of thresholding the image coming in, calculating the centroid of the entire image, and the centroid of the upper and lower halves. This information was used to generate a line and calculate an angle. PD control was then implemented to direct the blimp along the line (see Figure 8). Debugging code was added to help discern situations where the program would crash by visually indicating to the operator if the angles became too steep or if a division by zero occurred. Using this knowledge, we are able to optimize the controller and the program to keep from straying to these unruly angles. Realistically, such ideal environments will not be encountered. However, the same path following techniques can be applied if the location of the blimp is known. Further, this sensing technology can be applied to near Earth UAV's with GPS access which can use objects such as roads and rivers to navigate.

5 Lessons Learned

The difficulty of the line following section was evident after practice runs for each team. To compensate for this, each team was allotted two restarts (i.e. the blimp can be placed back in the position it last lost the line). With the incorporation of this rule, both teams were able to follow the line until reaching the fan area, a distance of 75 feet. Once confronted with low speed wind currents, each team's blimp was immediately blown off course, unable to demonstrate gust stabilization. The target identification task also proved to be difficult. Teams were only able to locate and mark 1 to 4 victims out of a possible 8. In addition to the scores accumulated in the collision avoidance and target identification sections, each team was also judged on the design of both the flight system and the marker deployment mechanism. The overall winner of the 2005 competition was Drexel University.

The key challenges identified in the inaugural competition were found mostly in the line following section. For example, sunlight shined sporadically on the course resulting in large gradients which effected the efficiency of the computer vision algorithms. Also, wireless video transmission indoors is diminished, but still usable at short distances (i.e. less than 100 feet). Furthermore, stabilizing an aerial robot in the presence of wind gusts is still a prevalent challenge.

In the teleoperated portion of the competition, teams found it difficult to interpret the raw video transmitted from the blimp's wireless camera. A *bird's eye* view is oftentimes unfamiliar to the operator and may require some image processing (e.g. object recog-

³<http://www.rctoys.com/eyecam.php>

⁴<http://www.hauppauge.com>

niton) techniques to identify victims, tables, chairs, etc. During the teleoperated portion of the course, one of the teams lost control of their blimp when it was flown over a portion of the course that had been heated by sunlight. This observation identified thermals as a major concern for aerial robots operating in near-Earth environments.

The lessons learned from past competitions include a mix of technology from both teams. The most robust way to control a blimp were concluded to be the Drexel University set up, in which twin propellers were actuated via a servo and turning was propelled by a rudder propeller. For radio communications, the PC2RC circuit proved to be the championed method, as it provided easy to implement PC control.

6 Conclusions

The design of a sensor suite for a micro air vehicle varies greatly from the sensor suites utilized on traditional UAVs. Flying below tree tops or in and around urban structures prevents the use of GPS. Furthermore, devices such as IMU's and gyros often strain the payload capacities of small, lightweight aircraft. Design then focuses on achieving fundamental autonomous tasks such as altitude control and obstacle avoidance using the smallest packages possible. However, even the most highly-developed control system will fail when presented with unforeseen obstacles. Telephone wires, for example, are extremely thin, but could easily be fatal to a MAV. Such near-Earth environment impediments demand the use of varied sensing technologies to ensure robustness. Through fusion of optic flow sensing, vision based guidance and wireless network localization, aerial vehicles are provided with a diverse sensor suite capable of addressing the issues faced.

This paper demonstrates the porting of these techniques onto a robotic blimp, which provides a robust, versatile platform with dynamics that can be characterized and modelled. To begin to characterize these sensor suites, future work must be conducted to measure the reactions of these sensors to variables introduced in a controlled near-Earth environment. To facilitate controller design, experimental results must be duplicated in simulated models. With well understood models and corroborating physical data, design can then move towards making MAV's fully autonomous in near-Earth environments.

Acknowledgements: The author would like to ac-

knowledge the following professors who participated in the 2005 and 2006 competitions: Bruce Maxwell (Swarthmore), Hong Zhang (Rowan), Rungan Nathan (Villanova), Peng Song (Rutgers) and Doug Blank (Bryn Mawr). Additionally, the following Drexel students played key roles in organizing and executing the competition: William Green, Keith Sevcik, Vefa Narli, Dan Hanna, Steve Wilrigs and Paul Gisondi.

References

- [1] Blitch, J., "World Trade Center Search-and-Rescue Robots", Plenary Session *IEEE Int Conf Robotics and Automation*, Washington D.C., May 2002.
- [2] Floyd D. Spence National Defense Authorization Act for Fiscal Year 2001, P.L. 106-398 Sec 220.
- [3] Green, W.E., Sevcik, K.W., Oh, P.Y., "A Competition to Identify Key Challenges for Unmanned Aerial Robots in Near-Earth Environments", *IEEE International Conference on Advanced Robotics (ICAR)*, Seattle, WA, pp. 309-315, July 2005.
- [4] Kitano, H.; Asada, M.; Noda, I.; Matsubara, H., "RoboCup: robot world cup", *IEEE Robotics and Automation Magazine*, V5, N3, pp. 30-36, September 1998.
- [5] Murphy, R., et al, "Mobility and sensing demands in USAR", *IEEE Industrial Electronics Conference (IECON)*, V1, pp. 138-142, 2000.
- [6] Murray, R.M., "Autonomous Machines: Racing to Win the DARPA Grand Challenge", *Proc. American Control Conf.*, Portland, OR, pp. 9-10, June 2005.
- [7] Oh, P.Y., Green, W.E., "Closed Quarter Aerial Robot Prototype to Fly In and Around Buildings", *Int. Conference on Computer, Communication and Control Technologies*, Orlando, FL, pp. 302-307, July
- [8] Sevcik, K., Oh, P. "PC to RC Interface", *Servo Magazine*, July 2004